




WIDE INNER RING BEARINGS



SSUC 200 Series

Normal Duty
Set Screw Locking

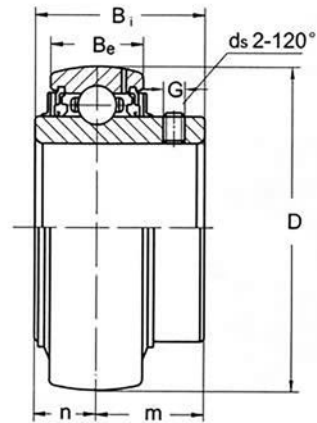

Unit No.	Shaft Dia.		Dimensions inch / mm							Basic load Ratings lbf / N		Weight	
	In.	mm	D	Bi	Be	n	m	G	ds	dynamic C	static Co	kg	Lbs
SSUC 201-8	1/2											0.21	0.46
202-10	5/8											0.19	0.42
204		20	1.85039	1-1/4	5/8	1/2	23/32	0.197	1/4-28UNF	2465	1241	0.17	0.37
204-12	3/4		47.0	31.8	15.9	12.7	18.3	5.0	M6x1.0	10957	5517	0.18	0.40
SSUC 205		25										0.20	0.44
205-14	7/8		2.04724	1-11/32	21/32	9/16	25/32	0.216	1/4-28UNF	2678	1445	0.23	0.51
205-15	15/16		52.0	2 34.1	16.7	14.3	19.8	5.5	M6x1.0	11900	6426	0.21	0.46
205-16	1											0.20	0.44
SSUC 206		30										0.33	0.73
206-17	1-1/16											0.37	0.81
206-18	1-1/8		2.44094	1-1/2	3/4	5/8	7/8	0.234	1/4-28UNF	3732	2134	0.35	0.77
206-19	1-3/16		62.0	38.1	19.1	15.9	22.2	6.0	M6x1.0	16584	9486	0.33	0.73
206-20	1-1/4S											0.30	0.66
SSUC 207		35										0.40	0.88
207-20	1-1/4											0.55	1.21
207-21	1-5/16		2.83465	1-11/16	25/32	11/16	1	0.256	5-16/24UNF	4905	2933	0.52	1.14
207-22	1-3/8		72.0	42.9	19.8	17.5	25.4	6.5	M8x1.0	21794	13031	0.49	1.08
207-23	1-7/16											0.46	1.01
SSUC 208		40										0.65	1.43
208-24	1-1/2		3.14961	1-15/16	13/16	3/4	1-3/16	0.313	5-16/24UNF	5525	3273	0.69	1.52
208-25	1-9/16		80.0	49.2	20.6	19.1	30.2	7.9	M8x1.0	24557	14544	0.67	1.47
SSUC 209		45										0.70	1.54
209-26	1-5/8		3.34646	1-15/16	7/8	3/4	1-3/16	0.313	5-16/24UNF	6248	3485	0.80	1.76
209-27	1-11/16		85.0	49.2	22.2	19.1	30.2	7.9	M8x1.0	27770	15487	0.76	1.67
209-28	1-3/4											0.71	1.56
SSUC 210		50										0.80	1.76
210-30	1-7/8		3.54331	2-1/32	15/16	3/4	1-9/32	0.344	3/8-24UNF	6715	3987	0.87	1.91
210-31	1-15/16		90.0	51.6	23.8	19.1	32.5	8.7	M10x1.25	29844	17714	0.82	1.80
210-32	2S											0.77	1.69
SSUC 211		55										1.08	2.38
211-32	2		3.93701	2-3/16	31/32	7/8	1-5/16	0.344	3/8-24UNF	8288	4973	1.23	2.71
			100.0	55.6	24.6	22.2	33.3	8.7	M10x1.25	36831	22100		