



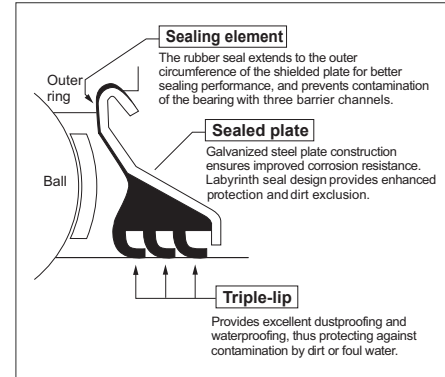

CORROSION RESISTANT PRODUCTS

TRIPLE-LIP SEAL BLACK OXIDE INSERT BEARINGS Dual Set Screw Locking

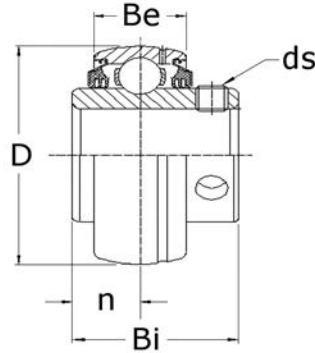

Insert Part No.	Shaft Diameter Inch	Dimensions inch / mm					Basic Load Ratings lbf / N		Weight Lbs kg
		D	Bi	Be	n	ds	dynamic C	static Co	
UC205-16R3BO	1	2.04724 52.0	1-11/32 34.1	21/32 16.7	9/16 16.7	1/4-28UNF M6x1.0	3150 14000	1700 7560	0.55 0.20
UC206-19R3BO	1-3/16	2.44094 62.0	1-1/2 38.1	3/4 19.1	5/8 15.9	1/4-28UNF M6x1.0	4390 19510	2510 11160	0.73 0.33
UC206-20R3BO	1-1/4S								0.65 0.30
UC207-20R3BO	1-1/4	2.83465 72.0	1-11/16 42.9	25/32 19.8	11/16 17.5	5/16-24UNF M8x1.0	5770 25640	3450 15330	1.15 0.52
UC207-22R3BO	1-3/8								1.05 0.48
UC207-23R3BO	1-7/16								0.65 0.43
UC208-24R3BO	1-1/2	3.14961 80.0	1-15/16 49.2	13/16 20.6	3/4 19.1	5/16-24UNF M8x1.0	6500 28890	3850 17110	1.40 0.64
UC209-28R3BO	1-3/4	3.34646 85	1-15/16 49.2	7/8 22.2	3/4 19.1	5/16-24UNF M10x1.25	7350 32670	4100 18220	1.50 0.68
UC210-31R3BO	1-15/16	3.54331 90.0	2-1/32 51.6	15/16 23.8	15/16 19.1	3/8-24UNF M10x1.25	7900 35120	4690 20850	1.80 0.82
UC210-32R3BO		2S	1.70 0.77						
UC211-32R3BO	2	3.93701 100.0	2-3/16 55.6	31/32 24.6	7/8 22.2	3/8-24UNF M10x1.25	9750 43340	5850 26000	2.55 1.16