




DISC HARROW BALL BEARINGS TRIPLE LIP SEAL Series

Non-Relubricatable Type
Spherical O.D.

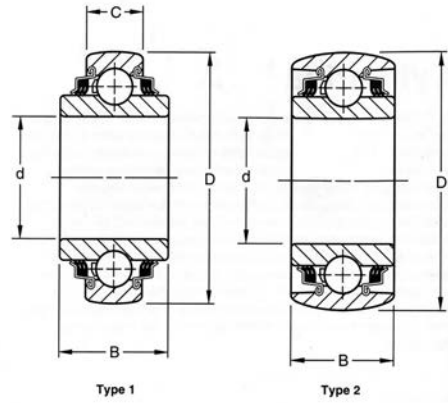

ROUND BORE												
Unit No.	Type	Bore d	tolerance +0.000 to minus	Outside Diameter D	tolerance +0.000 to minus	Ring Width +0.000,-0.00 +0.00,-12 mm		Static Load Rating Cor		Dynamic Load Rating Cr		Weight Lbs / kg
						B Inner	C Outer	lbf	N	lbf	N	
						In. mm	In. mm	In. mm	N	In. mm	N	
W208PPB7	1	1.1880 30.170	0.0005 0.013	3.150 80	0.0005 0.013	1.188 30.18	0.709 18.00	4 500	19 900	8 300	36 800	1.41 0.640
W208PPB2	1	1.5005 38.113	0.0005 0.013	3.150 80	0.0005 0.013	1.688 42.96	0.709 18.00	4 500	19 900	8 300	36 800	1.59 0.721
W208PPB23	1	1.5005 38.113	0.0005 0.013	3.150 80	0.0005 0.013	1.688 42.96	1.188 30.18	3 550	15 600	7 200	32 000	1.50 0.680
W209PPB4	2	1.5350 39.000	0.0100 0.250	3.346 85	0.0006 0.015	1.188 30.18	1.188 30.18	4 550	20 200	8 300	36 800	1.65 0.748
W209PPB2	2	1.7717 45.000	0.0005 0.013	3.346 85	0.0006 0.015	1.188 30.18	1.188 30.18	4 550	20 200	8 300	36 800	1.44 0.653
W210PPB5	2	1.7850 45.340	0.0100 0.250	3.543 90	0.0006 0.015	1.188 30.18	1.188 30.18	5 200	23 000	9 000	39 900	1.75 0.794
W211PPB13	1	1.785 45.340	0.0100 0.250	3.937 100	0.0006 0.015	1.312 33.34	1.000 25.40	6 550	29 000	11 000	48 800	2.25 1.02
W210PPB2	2	1.9380 49.230	0.0005 0.013	3.543 90	0.0006 0.015	1.188 30.18	1.188 30.18	5 200	23 000	9 000	39 900	1.56 0.708
W211PPB2	2	2.1880 55.580	0.0006 0.015	3.937 100	0.0006 0.015	1.312 33.34	1.312 33.34	6 550	29 000	11 000	48 800	2.13 0.966
W211PPB8	1	2.1880 55.580	0.0006 0.015	3.937 100	0.0006 0.015	1.312 33.34	0.984 25.00	6 550	29 000	11 000	48 800	1.85 0.839
W214PPB2	2	2.7559 70.000	0.0006 0.015	4.921 125	0.0008 0.020	1.562 39.69	1.562 39.69	9 800	43 500	16 000	71 000	3.96 1.796
W214PPB9	1	2.7660 70.260	0.0010 0.025	4.921 125	0.0008 0.020	1.750 44.45	1.102 28.00	9 800	43 500	16 000	71 000	3.96 1.796