




AGRICULTURAL BEARINGS



DISC HARROW BALL BEARINGS TRIPLE LIP SEAL Series Relubricatable type

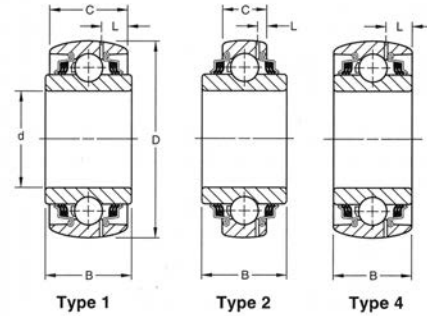

SQUARE BORE														
Unit No.	Type	Shaft Size		Outside Diameter D	tolerance +0.000" to minus		Ring Width +0.000,-0.005 +0.00,-12 mm		Static Load Rating Cor		Dynamic Load Rating Cr		Weight	
							B Inner	C Outer						
		In.	mm	In.	mm	In.	mm	In.	mm	lbf	N	lbf	N	Lbs
GW208PPB6	2	1	25.4	3.1496	80	0.0005	1.438	0.827	4 500	19 900	8 300	36 800	1.75	0.794
GW208PPB5	2	1-1/8	28.6	3.1496	80	0.0005	1.438	0.827	4 500	19 900	8 300	36 800	1.47	0.667
GW208PPB8	1	1-1/8	28.6	3.1496	80	0.0005	1.438	1.188	4 500	19 900	8 300	36 800	1.75	0.794
GW208PPB17	4	1-1/8	28.6	3.3755	85.7	0.0005	1.438	1.188	4 500	19 900	8 300	36 800	2.04	0.925
GW210PPB6	1	1-1/8	28.6	3.5433	90	0.0006	1.438	1.438	5 200	23 000	9 000	39 900	2.15	0.980
GW209PPB5	1	1-1/4	31.8	3.3456	85	0.0006	1.438	1.188	4 550	20 200	8 300	36 800	1.75	0.794
GW209PPB8	2	1-1/4	31.8	3.3456	85	0.0006	1.438	0.866	4 550	20 200	8 300	36 800	1.65	0.748
GW210PPB4	4	1-1/8	28.6	3.5433	90	0.0006	1.188	1.188	5 200	23 000	9 000	39 900	1.75	0.794
GW211PPB3	4	1-1/2	28.1	3.9370	100	0.0006	1.312	1.312	6 550	29 000	11 000	48 800	2.66	1.207
GW214PPB4	4	2	50.8	4.9213	125	0.0008	1.562	1.562	9 800	43 500	16 000	71 000	4.75	2.155