



# BEARING UNITS





## PILLOW BLOCKS - Low Shaft Height

### SBAK 200 Series

Normal Duty

Set Screw Locking

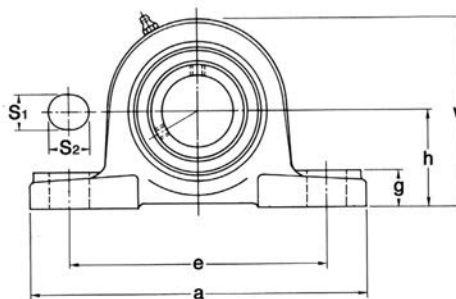

Unit No.	Shaft Dia.		Dimensions inch / mm										Bolt Size	Bearing No.	Housing No.	Weight Lbs kg
			h	a	e	b	S1	S2	g	w	Bi	n				
SBAK 204	3/4	20	1-1/4	5	3-25/32	1-39/64	1/2	5/8	9/16	2-15/32	0.984	0.276	M10 3/8	SB 204	AK204	0.90 0.41
204-12			31.8	127.0	96.0	40.9	12.7	15.9	14.3	62.7	25.0	7		204-12		
SBAK 205	7/8	25	1-5/16	5-1/2	4-1/8	1-49/64	1/2	3/4	19/32	2-5/8	1.063	0.295	M10 3/8	SB 205	AK205	1.36 0.62
205-14			33.3	139.7	104.8	44.8	12.7	19.1	15.1	66.7	27.0	7.5		205-14		
205-15		15/16												205-15		
205-16		1												205-16		
SBAK 206	1-1/16	30	1-9/16	6-5/16	4-49/64	1-3/4	9/16	3/4	5/8	3-1/8	1.181	5/16	M14 1/2	SB 206	AK206	2.16 0.98
206-17			39.7	160.3	121.0	44.5	14.3	19.1	15.9	79.4	30.0	8		206-17		
206-18		1-1/8												206-18		
206-19		1-3/16												206-19		
206-20		1-1/4S												206-20		
SBAK 207	1-1/4	35	1-13/16	6-9/16	5	1-7/8	19/32	3/4	21/32	3-9/16	1.260	0.335	M14 1/2	SB 207	AK207	2.64 1.20
207-20			46.0	166.7	127.0	47.6	15.1	19.1	16.7	90.5	32.0	8.5		207-20		
207-21		1-5/16												207-21		
207-22		1-3/8												207-22		
207-23		1-7/16												207-23		
SBAK 208	1-1/2	40	1-15/16	7-3/32	5-11/32	2-1/16	19/32	13/16	23/32	3-55/64	1.339	0.354	M14 1/2	SB 208	AK208	3.74 1.70
208-24			49.2	180.2	135.7	52.4	15.1	20.6	18.3	98.0	34.0	9		208-24		
208-25		1-9/16												208-25		